

Intrinsically Safe Pressure Transmitters



SERIES 625/626

HAZARDOUS LOCATION PRESSURE TRANSMITTERS

The NOSHOK Series 625 and 626 pressure transmitters combine the reliability and long life of diffused semiconductor and sputtered thin film strain gage sensors with safe electronics for outstanding performance and value. These transmitters were designed for applications that require pressure measurement in hazardous environments. All wetted parts are made of stainless steel (Hastelloy® C4 optional on front flush model), welded with no internal O-rings, gaskets or seals.

These transmitters are available with a wide variety of pressure connections, ranges and electrical connections to suit most applications. All units undergo extensive testing during the manufacturing process to ensure that the highest performance is achieved in the demanding environments found in today's applications. The transmitters are available with standard threaded connections as well as flush diaphragm configurations and are Factory Mutual and Canadian Standards Association approved. All models incorporate significant levels of RFI, EMI and ESD protection.

FEATURES

- Accuracy to $\pm 0.125\%$ Full Scale (BFSL)
- Advanced diffused semiconductor and sputtered thin film sensor for maximum stability
- Welded 316 stainless steel, optional Hastelloy C4 on flush diaphragm model
- 1/2" NPT conduit connection
- Entity approved for use with all approved zener barriers where required
- ANSI/ISA-12.27.01-2003 Approved single seal

APPLICATIONS

- Hydraulic and pneumatic systems
- Pumps and compressors
- Test equipment and systems
- HVAC systems
- Power generation
- Water and wastewater
- Refrigeration equipment
- Laboratory and test equipment
- Chemical/Petrochemical
- Marine
- Pipeline gas compressors
- Oil field
- Offshore

SPECIFICATIONS

Output signal	4 mA to 20 mA, 2-wire
Accuracy	$\pm 0.25\%$ Full Scale (BFSL); Optional $\pm 0.125\%$ Full Scale (BFSL); (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Hysteresis	$\leq \pm 0.1\%$ Full Scale
Repeatability	$\leq \pm 0.05\%$ Full Scale
Stability	$\leq \pm 0.2\%$ Full Scale for 1 year, non-accumulating
Pressure ranges	Standard ranges from vacuum to 60000 psi
Proof pressure	3.5 times Full Scale for ranges 0 psi to 5 psi through 0 psi to 200 psi 2 times Full Scale for ranges 0 psi to 300 psi through 0 psi to 10000 psi 1.5 times Full Scale for 0 psi to 15000 psi range 1.2 times Full Scale for ranges 0 psi to 25000 psi and 0 psi to 60000 psi
Burst pressure	4 times Full Scale for ranges 0 psi to 5 psi through 0 psi to 200 psi 4 times Full Scale for ranges 0 psi to 300 psi through 0 psi to 10000 psi 3 times Full Scale for 0 psi to 15000 psi range 2 times Full Scale for ranges 0 psi to 25000 psi and 0 psi to 60000 psi
Power supply	10 Vdc to 30 Vdc unregulated Minimum voltage across transmitter connections is 10 Vdc
Load limitations	$\leq (V_{Power}-10)/0.020$ Amp
Response time	≤ 1 ms (between 10 % and 90 % Full Scale)
Durability	$> 100,000,000$ Full Scale cycles
Adjustment	$\pm 10\%$ Full Scale for zero and span
Temperature ranges	Compensated 32 °F to 176 °F (0 °C to 80 °C) Zero effect is $\pm 0.011\%$ Full Scale/°F Span effect is $\pm 0.011\%$ Full Scale/°F Ambient -4 °F to 176 °F (-20 °C to 80 °C) Media -4 °F to 185 °F (-20 °C to 85 °C) Storage -22 °F to 221 °F (-30 °C to 105 °C)
Wetted materials	Model 625 is 316 stainless steel for ranges up through 0 psi to 300 psi, 316 stainless steel with 17-4PH stainless steel diaphragm for ranges 0 psi to 300 psi and higher; Model 626 is 316 stainless steel with BUNA N O-ring; Hastelloy® C4 optional; Viton® O-ring optional
Housing material	316 stainless steel
Environmental rating	IP65 to IP67 depending upon electrical connection
Electromagnetic rating	Meets EMC norm EN61326: 1997/A1 1998 RFI, EMI and ESD protected
Electrical rating	Reverse polarity, over-voltage and short circuit protected
Shock	1000 g's according to IEC770 for mechanical shock
Vibration	20 g's according to IEC770 under resonance conditions
Hazardous approvals	Factory Mutual and Canadian Standards Association approved as indicated ANSI/ISA-12.27.01-2003, Approved single seal
Weight	Approximately 7 oz.

NOSHOK Model 625 and 626 transmitters are approved for use in hazardous location applications as follows:
Intrinsically Safe, entity approval for Class I, II and III, Division 1, Groups A, B, C, D, E, F and G; and Class I, Zone 0 Aex ia IIC Dust Ignition-proof for Class II and III, Division 1, Groups E, F and G
Non incandive for Class I, Division 2, Groups A, B, C and D
FMRC 3600, 3610, 3611, 3810 (including supplement #1),
ISA-S12.0. 01, IEC 60529 (including amendment #1)

ORDERING INFORMATION										
SERIES 625	Stainless steel threaded connection			SERIES 626S	316 stainless steel flush diaphragm			SERIES 626H	Hastelloy flush diaphragm	
PRESSURE RANGES	0 inH ₂ O to 50 inH ₂ O	50 IN	0 psig to 2 psig	2	0 psig to 200 psig	200	0 psig to 5000 psig	5000	0 psia to 15 psia	15A
	0 inH ₂ O to 100 inH ₂ O	100 IN	0 psig to 3 psig	3	0 psig to 300 psig	300	0 psig to 8000 psig	8000	0 psia to 30 psia	30A
	-30 inHg to 0 psig	30V	0 psig to 5 psig	5	0 psig to 500 psig	500	0 psig to 10000 psig	10000	0 psia to 60 psia	60A
	-30 inHg to 30 psig	30/30	0 psig to 15 psig	15	0 psig to 750 psig	750	0 psig to 15000 psig	15000	0 psia to 100 psia	100A
	-30 inHg to 60 psig	30/60	0 psig to 30 psig	30	0 psig to 1000 psig	1000	0 psig to 25000 psig	25000	0 psia to 150 psia	150A
	-30 inHg to 100 psig	30/100	0 psig to 50 psig	50	0 psig to 1500 psig	1500	0 psig to 40000 psig	40000	0 psia to 200 psia	200A
	-30 inHg to 150 psig	30/150	0 psig to 100 psig	100	0 psig to 2000 psig	2000	0 psig to 60000 psig	60000	0 psia to 300 psia	300A
	-30 inHg to 200 psig	30/200	0 psig to 150 psig	150	0 psig to 3000 psig	3000				
psig = Gauge Pressure psia = Absolute Pressure Other ranges available on special request NOTE: Series 626 is available for pressure ranges up to 0 psig to 8000 psig										
ACCURACY	1 ±0.25 % Full Scale (BFSL)			2 ±0.125 % Full Scale (BFSL)						
OUTPUT SIGNALS	1 4 mA to 20 mA, 2-wire									
PROCESS CONNECTIONS	2 1/4" NPT Male		3 7/16"-20 UNF SAE #4 Male			8 1/2" NPT Male				
	11 G1/2B Male flush (model 626 only)					13 G1B Male flush (model 626 only)				
	(pressure ranges 0 psig to 30 psig and higher)			(pressure ranges less than 0 psig to 30 psig)						
ELECTRICAL CONNECTIONS	1 36" cable (connected to option 8)				25 M12x1 4-pin IP67					
	3 6-pin bendix - IP65				36 Integral cable 36" - IP67					
	8 Hirschmann (DIN EN 175301-803 Form A)									
	14 Hirschmann connector 1/2" NPT conduit - IP65									
OPTIONS	ORF Threaded Orifice (model 625 only)									


Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

Series 625
 Pressure Range 0 psig to 500 psig
 Accuracy ± 0.25 % Full Scale
 Output Signal 4 mA to 20 mA
 Process Connection 1/2" NPT Male
 Electrical Connection Hirschmann
 Option Threaded Orifice

625 - 500 - 1 - 1 - 8 - 8 - ORF

Outline Dimensions

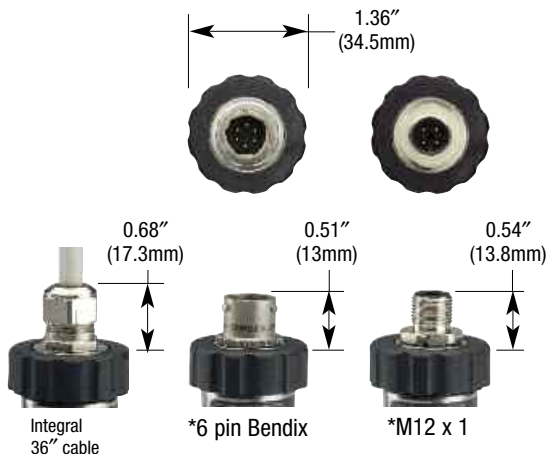

*Note: mate supplied separately or customer supplied

2-WIRE WIRING

	Hirschmann	Cable	M12	Bendix
+ Supply	1	Red/Brown	1	A
+ Output	2	Black/Green	3	B

NOTE
 See 621/622 Series for G1/2B and G1B Front Flush Process Connection Dimensions pg. 27