



## Features

- Selectable  $\pm 0.2$ ,  $\pm 2$ ,  $\pm 20$ ,  $\pm 200$ ,  $\pm 300$  &  $\pm 600$  Vdc voltage ranges
- Selectable  $\pm 2$ ,  $\pm 20$ ,  $\pm 200$  mA and  $\pm 5$ A dc current ranges
- All ranges factory calibrated
- 99.99% full scale accuracy
- Scalable to  $\pm 99,999$  for use with external current shunts
- Up to 60 conversions per second
- Peak or valley capture & display
- Selectable adaptive digital filter
- Universal AC power: 85-264 Vac
- Built-in isolated excitation supply: 5, 10 or 24 Vdc
- 1/8 DIN case sealed to NEMA-4X from front panel
- Optional serial I/O: Ethernet, USB, RS232, RS485, Ethernet-to-RS485 converter
- Optional relay output: dual or quad relays, contact or solid state
- Optional isolated analog output: 4-20 mA, 0-20 mA, 0-10V, -10 to +10V
- Optional low voltage power: 10-48 Vdc or 12-32 Vac



## Description

Laureate™ DC voltage and current panel meters with a DC signal conditioner board combine high accuracy with high read rate and a wide range of isolated output options for computer interface and control. Accuracy is 99.99% of full scale  $\pm 2$  counts.

- **DC voltmeter operation** (selected by jumpers) provides six full-scale voltage ranges from  $\pm 200.00$  mV with 10 mV resolution to  $\pm 600.0$ V with 100 mV resolution. The 200.00 mV and 2.0000V ranges provide a 1 Gohm high input impedance.
- **DC ammeter operation** (selected by jumpers) provides four full-scale current ranges from  $\pm 2.0000$  mA with 0.1 mA resolution to  $\pm 5.000$  A with 1 mA resolution. The 5.000A range measures the IR drop across a built-in 10 milliohm current shunt.

All voltage and current ranges are factory calibrated, with calibration factors for each range stored in an EEPROM on the signal conditioner board. This allows ranges and signal conditioner boards to be changed in the field without recalibrating the meter.



**External current shunts are fully supported.** Scaling from full-scale millivolts, such as 50 mV or 100 mV, to amperes is easily accomplished from the front panel of the meter. The scalable display is five full digits up to  $\pm 99,999$  counts.

**High read rates** at up to 60 or 50 conversions per second while integrating the signal over a full power cycle are provided by Concurrent Slope (US Pat 5,262,780) analog-to-digital conversion. High read rates are ideal for peak or valley capture, real-time computer interface, and control. Peak and valley values are automatically captured. These may be displayed via a front panel pushbutton command or a control signal at the rear connector, or be transmitted as serial data.

**Digital filtering** is selectable for electrically noisy environments, including a batch averaging filter and an adaptive moving average filter which provides a choice of 8 time constants from 80 ms to 9.6 s. When a significant change in signal level occurs, that filter adapts by briefly switching to the shortest time constant to follow the change, then reverts back to the selected time constant. In a selectable Auto filter mode, the filter time constant is automatically selected based on detected signal noise.

**Designed for system use.** Optional plug-in boards include Ethernet and other serial communication boards, dual or quad relay boards, and an isolated analog output board. Laureates may be powered from 85-264 Vac or optionally from 12-32 Vac or 10-48 Vdc. The display is available with red or green LEDs. The 1/8 DIN case meets NEMA 4X (IP65) specifications from the front when panel mounted. Any setup functions and front panel keys can be locked out for simplified usage and security. A built-in isolated 5, 10, or 24 Vdc excitation supply can power transducers and eliminate the need for an external power supply. All power and signal connections are via UL / VDE / CSA rated screw clamp plugs.



## Specifications

### DC Voltage

DC Voltage Range	Resolution	Input Resistance	Error at 25°C ± 2 counts
±200.00 mV	10 µV	1 GΩ	0.01% FS
±2.000 V	100 µV	1 GΩ	0.01% FS
±20.000 V	1 mV	10 MΩ	0.01% FS
±200.00 V	10 mV	10 MΩ	0.01% FS
±600.0 V (not UL)	100 mV	10 MΩ	0.02% FS
±300.0 V	100 mV	10 MΩ	0.02% FS

### DC Current

DC Current Range	Resolution	Input Resistance	Error at 25°C ± 2 counts
±2.0000 mA	0.1 µA	100 Ω	0.01% FS
±20.000 mA	1.0 µA	10 Ω	0.01% FS
±200.00 mA	10 µA	1 Ω	0.01% FS
±5.000 A	1.0 mA	0.01 Ω	0.04% FS


### DC Voltage & Current

Display	
Readout Range Indicators	5 LED digits, 7-segment, 14.2 mm (.56"), red or green. -99999 to 99999 or -99990 to 99990 (count by 10) Minus sign, 2 red LED lamps
A-to-D Conversion	
Technique A-to-D rate Output update rate Display update rate	Concurrent Slope™ (Pat 5,262,780) 60/s at 60 Hz, 50/s at 50 Hz 56/s at 60 Hz, 47/s at 50 Hz, 3.5/s at 60 Hz, 3/s at 50 Hz
Accuracy	
Error at 25°C Span tempco Zero tempco	0.01% FS ± 2 counts (except 5A range) 0.003% of reading/°C 0.1 count/°C
Noise Rejection	
CMR, DC to 60 Hz NMR at 50/60 Hz	130 dB 90 dB with min filtering
Maximum Signal	
Max applied voltage Current protection	600 Vac for 20, 200 and 300 V ranges, 125 Vac for other ranges 25x for 2 mA, 8x for 20 mA, 2.5x for 200 mA, 1x for 5 A
Power	
Voltage, standard Voltage, optional Frequency Power Isolation	85-264 Vac or 90-300 Vdc (DC operation is not UL approved) 12-32 Vac or 10-48 Vdc DC or 47-63 Hz 250V rms working, 2.3 kV rms per 1 min test
Excitation Output (standard)	
Selectable levels Output isolation	5 Vdc ± 5%, 100 mA; 10 Vdc ± 5%, 120 mA; 24 Vdc ± 5%, 50 mA 50 Vdc to meter ground
Analog Output (optional)	
Output levels Current compliance Voltage compliance Scaling Resolution	4-20 mA, 0-20 mA, 0-10V, -10 to +10V (jumper selectable) 2 mA at 10V (> 5 kΩ load) 12V at 20 mA (< 60Ω load) Zero and full scale adjustable from -99999 to +99999 16 bits (0.0015% of full scale)



Isolation	250V rms working, 2.3 kV rms per 1 min test
<b>Relay Outputs (optional)</b>	
Relay types	2 Form C contact relays or 4 Form A contact relays (NO) 2 or 4 Form A, AC/DC solid state relays (NO)
Current ratings	8A at 250 Vac or 24 Vdc for contact relays 120 mA at 140 Vac or 180 Vdc for solid state relays
Output common Isolation	Isolated commons for dual relays or each pair of quad relays 250V rms working, 2.3 kV rms per 1 min test
<b>Serial Data I/O (optional)</b>	
Board selections	Ethernet, Ethernet-to-RS485 server, USB, USB-to-RS485 server, RS485 (dual RJ11), RS485 Modbus (dual RJ45), RS232.
Protocols	Modbus RTU, Modbus ASCII, Laurel ASCII protocol
Data rates	300 to 19200 baud
Digital addresses	247 (Modbus), 31 (Laurel ASCII),
Isolation	250V rms working, 2.3 kV rms per 1 min test
<b>Signal Connections</b>	
	<p>-EXCITATION 1 out - in +EXCITATION 2 out + - SIGNAL INPUT 3 in - +SIGNAL INPUT 4 in +</p>
<b>Environmental</b>	
Operating temperature	0°C to 60°C
Storage temperature	-40°C to 85°C
Relative humidity	95% at 40°C, non-condensing
Protection	NEMA-4X (IP-65) when panel mounted

## Mechanical

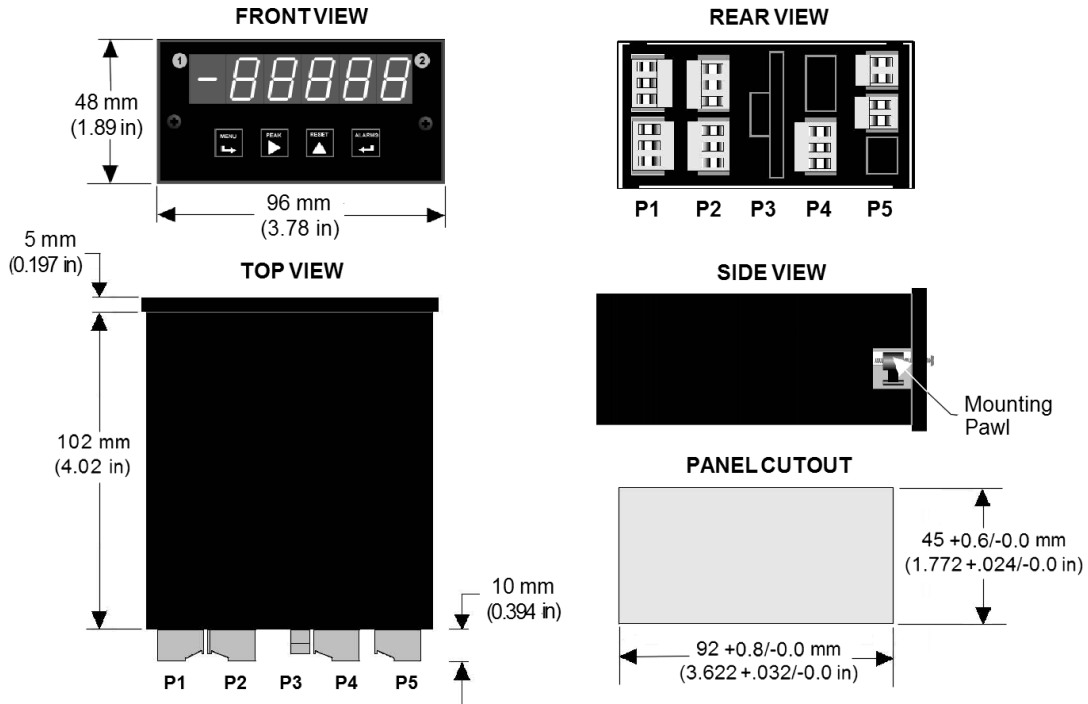

## Ordering Guide

Create a model a model number in this format: **L1000DCV1, IPC**

<b>DPM Type</b>	<b>L</b> Laureate Digital Panel Meter
<b>Main Board</b>	<b>1</b> Standard Main Board, Green LEDs <b>2</b> Standard Main Board, Red LEDs
<b>Power</b> (isolated)	<b>0</b> 85-264 Vac <b>1</b> 12-32 Vac or 10-48 Vdc
<b>Relay Output</b> (isolated)	<b>0</b> None <b>1</b> Two 8A Contact Relays <b>2</b> Two 120 mA Solid State Relays <b>3</b> Four 8A Contact Relays <b>4</b> Four 120 mA Solid State Relays
<b>Analog Output</b> (isolated)	<b>0</b> None <b>1</b> Isolated 4-20 mA, 0-20 mA, 0-10 V, -10 to +10V
<b>Digital Interface</b> (isolated)	<b>0</b> None <b>1</b> RS232 <b>2</b> RS485(dual RJ11 connectors) <b>4</b> RS485 Modbus (dual RJ45 connectors) <b>5</b> USB <b>6</b> USB-to-RS485 device server <b>7</b> Ethernet <b>8</b> Ethernet-to-RS485 device server
<b>Signal Input</b> (isolated)	<b>DC Volts</b> <b>DCV1</b> ±200.00 mV <b>DCV2</b> ±2.0000 V <b>DCV3</b> ±20.000 V <b>DCV4</b> ±200.00 V <b>DCV5</b> ±600.0 V (range does not qualify for U/L certification) <b>DCV6</b> ±300.0 V
	<b>DC Amps</b> <b>DCA1</b> ±2.0000 mA <b>DCA2</b> ±20.000 mA <b>DCA3</b> ±200.00 mA <b>DCA4</b> ±5.000 A
<b>Add-on Options</b>	<b>BL</b> Blank Lens without Button Pads <b>CBL01</b> RJ11-to-DB9 Cable <b>CBL02</b> USB-to-DB9 Adapter <b>CBL05</b> USB Cable, A to B <b>IPC</b> Splash-proof Cover <b>BOX1</b> NEMA-4 Enclosure <b>BOX2</b> NEMA-4 Enclosure plus IPC

