



### Features



- Factory calibrated for thermocouple types J, K, T, E, N, R, S
- Entire range of each thermocouple in one scale
- Highly accurate and repeatable
- Selectable 1° or 0.1°, degrees Celsius, Fahrenheit, Kelvin or Rankin
- Up to 60 conversions per second
- Peak or valley display
- Universal AC power, 85-264 Vac
- 1/8 DIN case sealed to NEMA-4X from front panel
- Optional serial I/O: Ethernet, USB, RS232, RS485, Ethernet-to-RS485 converter
- Optional relay output: dual or quad relays, contact or solid state
- Optional isolated analog output: 4-20 mA, 0-20 mA, 0-10V, -10 to +10V
- Optional low voltage power: 10-48 Vdc or 12-32 Vac

### Description

The Laureate thermocouple meter is factory calibrated for type J, K, T, E, N, R and S thermocouples for exceptional accuracy and repeatability. The entire span of each thermocouple type is presented in a single range. The thermocouple type, unit of measure (°C or °F), resolution (1° or 0.1°), and upscale or down-scale open sensor indication are selectable from the front panel or via the serial interface. Display in Kelvin or Rankin is selected by offsetting the Celsius or Fahrenheit ranges. Cold junction compensation is standard.

**All ranges for all thermocouple types** are digitally calibrated at the factory, with calibration factors stored in an EEPROM on the signal conditioner board. This allows temperatures sensors and signal conditioner boards to be changed in the field without recalibrating the meter.

**High read rates at up to 60 or 50 conversions per second** while integrating the signal over a full power cycle are provided by Concurrent Slope (US Pat 5,262,780) analog-to-digital conversion. High read rates are ideal for peak or valley capture, real-time computer interface, and control. Peak and valley values are automatically captured. These may be displayed via a front panel pushbutton command or a control signal at the rear connector, or be transmitted as serial data.

**Digital filtering is selectable** for electrically noisy environments, including a batch averaging filter and an adaptive moving average filter which provides a choice of 8 time constants from 80 ms to 9.6 s. When a significant change in signal level occurs, that filter adapts by briefly switching to the shortest time to follow the change, then reverts back to the selected time constant. In a selectable Auto filter mode, the filter time constant is automatically selected based on detected signal noise.

**Designed for system use.** Optional plug-in boards include Ethernet and other serial communication boards, dual or quad relay boards, and an isolated analog output board. Laureates may be powered from 85-264 Vac or optionally from 12-32 Vac or 10-48 Vdc. The display is available with red or green LEDs. The 1/8 DIN case meets NEMA 4X (IP65) specifications from the front when panel mounted. Any setup functions and front panel keys can be locked out for simplified usage and security. All power and signal connections are via UL / VDE / CSA rated screw clamp plugs.

### Specifications


TC Type	Range	Conformity Error
J	-210°C to +760°C (-347°F to +1400°F)	±0.09°C (±0.16°F)
K	-244°C to +1372°C (-408°F to +2501°F)	±0.1°C (±0.17°F)
T	0°C to +400°C (32°F to 752°F) -257°C to 0°C (-430°F to +32°F)	±0.03°C (±0.05°F) ±0.2°C (±0.36°F)
E	-240°C to +1000°C (-400°F to +1830°F)	±0.18°C (±0.32°F)
N	-245°C to +1300°C (-410°F to +2370°F)	±0.10°C (±0.17°F)
R	-45°C to +1768°C (-49°F to +3214°F)	±0.17°C (±0.31°F)
S	-46°C to +1768°C (-51°F to +3213°F)	±0.12°C (±0.22°F)



<b>Accuracy</b>	
Calibration Overall accuracy at 25°C Span tempco Reference junction accuracy Span tempco	NIST Monograph 125 (IPTS-68) ±0.01% of full span + conformity error ±0.003% of reading/°C 0.5°C, 10°C to 40°C ±0.003% of reading/°C
<b>Electrical</b>	
Input resistance Input current Max lead resistance Overvoltage protection NMR at 50/60 Hz CMR, DC-60 Hz CMV, DC-60 Hz	1 GΩ 100 pA 1 kΩ max for rated accuracy 125 Vac 80 dB plus selectable digital filter 120 dB with 500 ohm imbalance 250 Vac from power and earth grounds
<b>A-to-D Conversion</b>	
Technique A-to-D Rate Output Update Display Update	Concurrent Slope (Pat 5,262,780) 60/s at 60 Hz, 50/s at 50 Hz 56/s at 60 Hz, 47/s at 50 Hz 3.5/s at 60 Hz, 3/s at 50 Hz
<b>Display</b>	
Readout Color Indicators Open sensor indication	5 digits, 7-segment, 14.2 mm (.56") Red or green LED Minus sign plus 4 red LED lamps for relays Flashes full-scale
<b>Power</b>	
Voltage, standard Voltage, optional Frequency Power Isolation	85-264 Vac or 90-300 Vdc (DC operation not UL approved) 12-32 Vac or 10-48 Vdc DC or 47-63 Hz 250V rms working, 2.3 kV rms per 1 min test
<b>Analog Output (optional)</b>	
Output Levels Current compliance Voltage compliance Scaling Resolution Isolation	4-20 mA, 0-20 mA, 0-10V, -10 to +10V (jumper selectable) 2 mA at 10V (> 5 kΩ load) 12V at 20 mA (< 600Ω load) Zero and full scale adjustable from -99999 to +99999 16 bits (0.0015% of full scale) 250V rms working, 2.3 kV rms per 1 min test
<b>Relay Outputs (optional)</b>	
Relay Types Current Ratings Output common Isolation	2 Form C contact relays or 4 Form A contact relays (normally open) 2 or 4 Form A, AC/DC solid state relays (normally open) 8A at 250 Vac or 24 Vdc for contact relays 120 mA at 140 Vac or 180 Vdc for solid state relays Isolated commons for dual relays or each pair of quad relays 250V rms working, 2.3 kV rms per 1 min test
<b>Serial Data I/O (optional)</b>	
Board Selections Protocols Data Rates Digital Addresses Isolation	Ethernet, Ethernet-to-RS485 server, USB, USB-to-RS485 server, RS485 (dual RJ11), RS485 Modbus (dual RJ45), RS232. Modbus RTU, Modbus ASCII, Laurel ASCII protocol 300 to 19200 baud 247 (Modbus), 31 (Laurel ASCII), 250V rms working, 2.3 kV rms per 1 min test
<b>Environmental</b>	
Operating temperature Storage temperature Relative humidity Protection	0°C to 60°C -40°C to 85°C 95% at 40°C, non-condensing NEMA-4X (IP-65) when panel mounted



## Mechanical

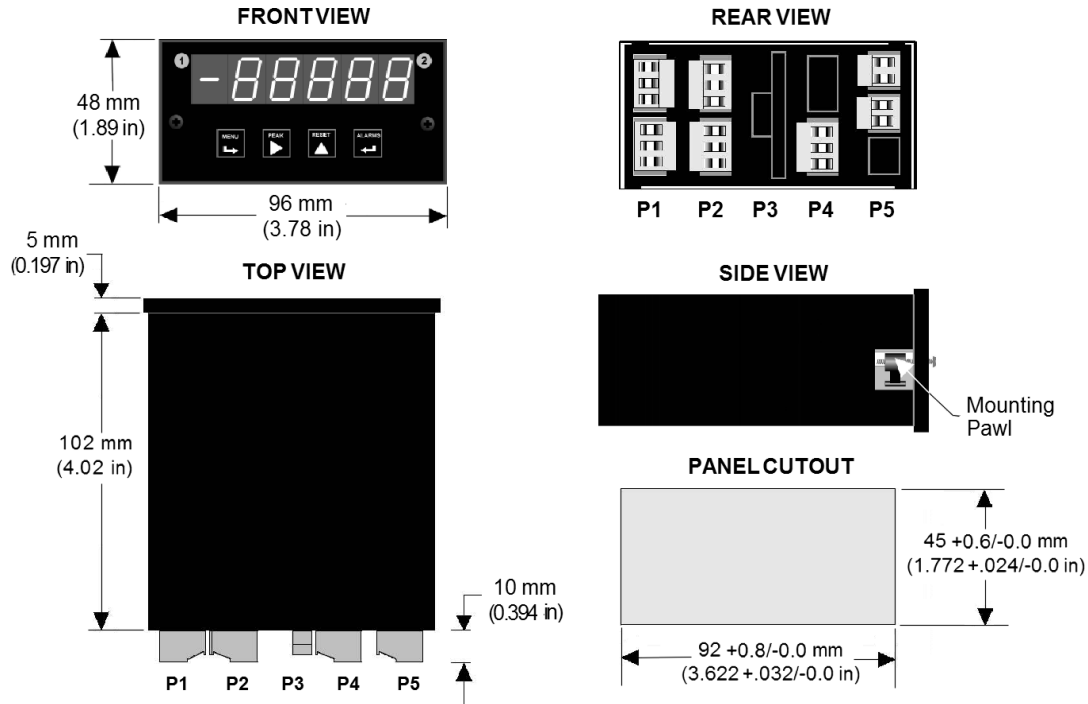

## Application Examples

<p><b>Operation as a 4-20 mA Transmitter</b></p> <p>With the optional analog output board, Laureate temperature meters can serve as superb, isolated 4-20 mA transmitters. The analog output is scaled to the display, which is linearized to °C or °F and is exceptionally accurate. The analog output further tracks the high read rate of the meter, at up to 60 readings per second at 60 Hz power. Fast update rates are beneficial in many closed-loop and PID control applications.</p>	
<p><b>Operation as a Fast Controller</b></p> <p>With the dual contact relay or dual solid state relay output board options, Laureate temperature meters can serve as extremely fast and accurate ON/OFF controllers for closed-loop temperature control. Multiple setpoint operating modes are individually selectable for each relay, as explained in the dual-setpoint controller section. Relay duty cycles and chatter can be minimized with programmable hysteresis and time delays. High duty cycles and extremely fast response times are possible with the solid state relay, which has a typical response time of only 17 ms.</p>	
<p><b>Operation as a Supervisory Monitor</b></p> <p>By using the optional dual contact relay or dual solid state relay output options, Laureate temperature meters can monitor processes and provide alarms or shutoffs when these processes exceed normal limits. A band deviation operating mode can be selected for each relay, where an alarm is generated whenever the reading is a selected number of counts above or below the setpoint. Relay operation can be selected as latching or non-latching. When an alarm or shutdown condition is reached, a latched output will remain in the alarm condition until it is reset by a front panel pushbutton, via the serial interface, or via the rear connector.</p>	



## Ordering Guide

Create a model a model number in this format: **L10000JC, IPC**

<b>DPM Type</b>	<b>L</b> Laureate Digital Panel Meter
<b>Main Board</b>	<b>1</b> Standard Main Board, Green LEDs <b>2</b> Standard Main Board, Red LEDs
<b>Power (isolated)</b>	<b>0</b> 85-264 Vac <b>1</b> 12-32 Vac or 10-48 Vdc
<b>Relay Output (isolated)</b>	<b>0</b> None <b>1</b> Two 8A Contact Relays <b>2</b> Two 120 mA Solid State Relays <b>3</b> Four 8A Contact Relays <b>4</b> Four 120 mA Solid State Relays
<b>Analog Output (isolated)</b>	<b>0</b> None <b>1</b> Isolated 4-20 mA, 0-20 mA, 0-10 V, -10 to +10V
<b>Digital Interface (isolated)</b>	<b>0</b> None <b>1</b> RS232 <b>2</b> RS485(dual RJ11 connectors) <b>4</b> RS485 Modbus (dual RJ45 connectors) <b>5</b> USB <b>6</b> USB-to-RS485 device server <b>7</b> Ethernet <b>8</b> Ethernet-to-RS485 device server
<b>Signal Input (isolated)</b>	<b>Thermocouple Type</b> <b>JC</b> Thermocouple Type J, -210°C to 760°C <b>JF</b> Thermocouple Type J, -347°F to 1400°F <b>KC</b> Thermocouple Type K, -347°C to 1372°C <b>KF</b> Thermocouple Type K, -408°F to 2501°F <b>TC</b> Thermocouple Type T, -257°C to 400°C <b>TF</b> Thermocouple Type T, -430°F to 752°F <b>EC</b> Thermocouple Type E, -240°C to 1000°C <b>EF</b> Thermocouple Type E, -400°F to 1830°F <b>EN</b> Thermocouple Type N, -245°C to 1300°C <b>NF</b> Thermocouple Type N, -410°F to 2370°F <b>SC</b> Thermocouple Type S, -46°C to 1768°C <b>SF</b> Thermocouple Type S, -51°F to 3214°F <b>RC</b> Thermocouple Type R, -45°C to 1768°C <b>RF</b> Thermocouple Type R, -49°F to 3213°F
<b>Add-on Options</b>	<b>BL</b> Blank Lens without Button Pads <b>CBL01</b> RJ11-to-DB9 Cable <b>CBL02</b> USB-to-DB9 Adapter <b>CBL05</b> USB Cable, A to B <b>IPC</b> Splash-proof Cover <b>BOX1</b> NEMA-4 Enclosure <b>BOX2</b> NEMA-4 Enclosure plus IPC

