
THERMOWELLS

("U" length for non-lagging wells) = "S" -1 1/2" ("U" length for lagging wells) = "S" -1 1/2" -"T'

(To solve for "T"), "T" = "S" -"U" -1 1/2" (When "U" and "S" are specified)


Reduced-Tip, Socket-Weld Thermowells

Reduced-Tip, Socket-Weld Thermowells are available in a variety of materials, process connection sizes, lengths, and optional lagging extensions. Thermowell specifications should be determined based on process conditions which include strength, temperature, pressure and corrosion-resistance requirements. The Reduced-Tip Socket-Weld is designed to be used with a class 3000 weld-o-let which allows the thermowell to be welded permanently into the process. The stepped construction is used in standard-duty applications and increases the speed of response while maintaining mechanical strength. They are designed with standard 0.260" bore diameters to accommodate sensing elements with a 0.252" maximum diameter. These wells are available as separate components or as part of complete sensor assemblies.

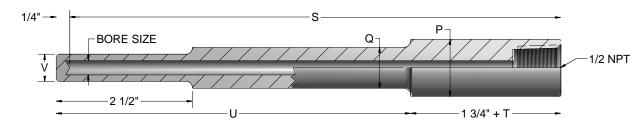

Thermowell Dimensions				
"P" PIPE SIZE				
NOM.	DIA.	"Q"	"V"	
3/4"	1.050"	3/4" Dia.	1/2" Dia.	
1"	1.315"	7/8" Dia.	1/2" Dia.	
1 1/4"	1.660"	1 1/4" Dia.	7/8" Dia.	
1 1/2"	1.900"	1 1/2" Dia.	7/8" Dia.	

ORDER CODES

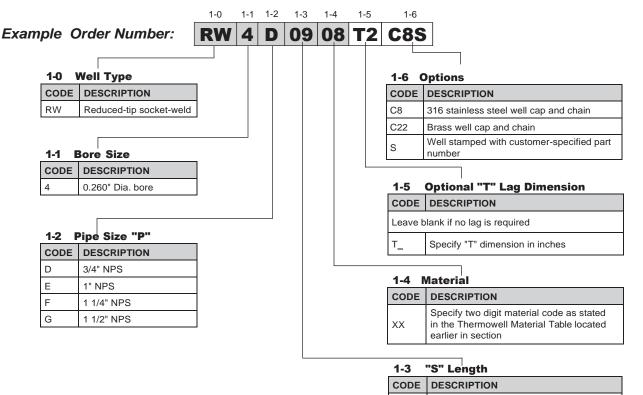

Specify length in inches using two digits plus fractional length

• 🚯 pyromation 🛛