


Part No.

# DCAP-300PSIG-D

*Ralston DCAP Pressure Test Pump with 300 psi Digital Gauge*

650 psi pneumatic hand pump, 300 psi gauge (0.25% full scale), 3ft hose, process connection

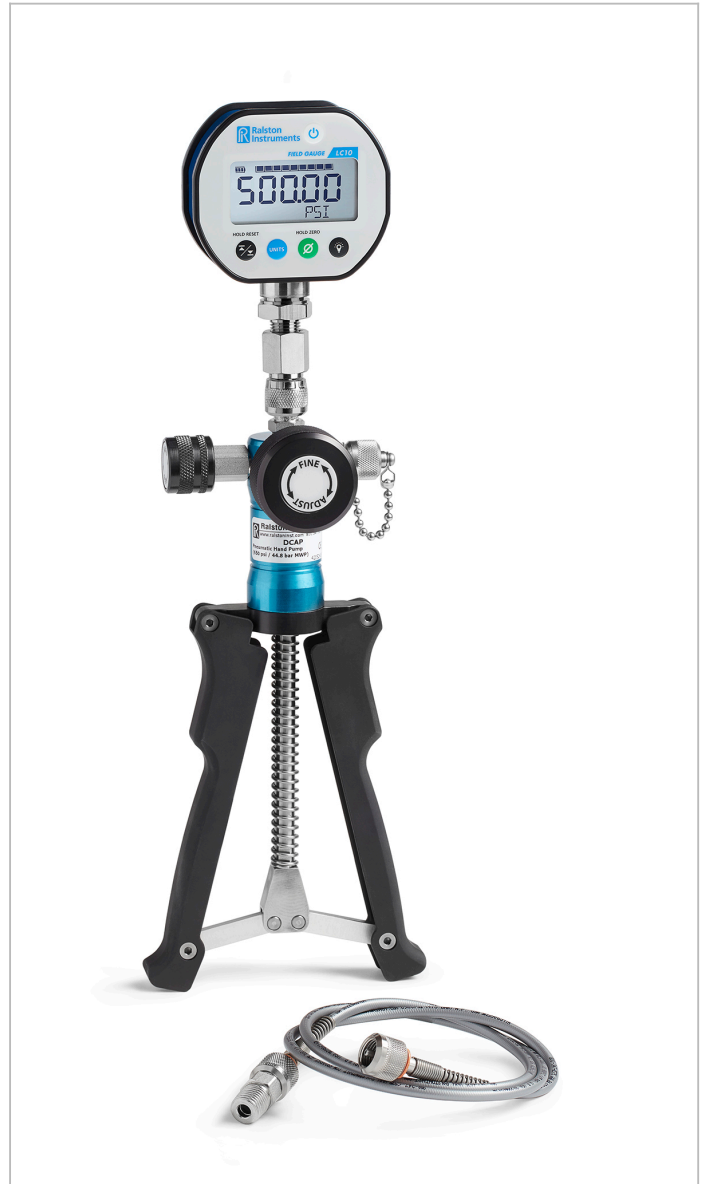

DCAP-300PSIG-D

## Included Items

- Hand Pump - DCAP Pneumatic Hand Pump (DCAP)
- Pressure Reference - LC10 pressure gauge, 300 psi / 20 bar / 2 MPa, 1/4" Male NPT bottom connection (LC10-GL2M)
- Reference Connection - 1/4" female NPT x female Quick-test, no check-valve, S.S. (QTHA-2FSA)
- Process Connection - 1/4" male NPT x male Quick-test, no check-valve, S.S. (QTHA-2MS0)
- Hose - Quick-test 6900 psi hose, S.S. hose ends, 3 ft (92 cm) long (QSQS-HOS-3ft)

## Specs/Attributes

Country of origin	USA
Fine Adjustment Resolution	0.00 PSI / 0.01 mbar / 0.00 kPa
Materials	Anodized Aluminum, Stainless Steel

## Specs/Attributes

Max Pressure	650 PSI / 45 bar / 4.50 MPa
Max Operating Temperature	130 °F / 54 °C
Min Operating Temperature	0 °F / -18 °C
Pressure Media	Air
Seal Materials	Buna-N, Delrin, Teflon
Hose 1	Quick-test Hose, Stainless Steel ends, 3ft / 0.9m long
Pressure Reference	Digital pressure gauge, 500 PSIG Pressure
Process Connection	1/4" Male NPT
Reference Connection	1/4" Female NPT
Weight	1.75 lbs / 795 grams
Dimensions	H: 3.53 in (8.97 cm) x W: 6 in (15.24 cm) x D: 15 in (38.1 cm)

## Hand Pump DCAP

Pressure Media	Air
Fine Adjustment Resolution	0.00 PSI / 0.01 mbar / 0.00 kPa
Media Compatibility	Air, Inert Gas, Natural Gas
Burst Pressure	2600 PSI / 180 bar / 18 MPa
Fluid Media	Air
Materials	Anodized Aluminum, Brass, Stainless Steel
Max Pressure	650 PSI / 45 bar / 4.50 MPa
Max Operating Temperature	140 °F / 60 °C
Country of origin	USA
Min Operating Temperature	0 °F / -18 °C
Seal Materials	Buna-N, Delrin
Harmonized Code	8414.20.0000
Outlet Port	Male Quick-test, Male Quick-test with cap and chain
Weight	1.75 lbs / 795 grams
Dimensions	H: 5 in (12.7 cm) x W: 3 in (7.62 cm) x D: 10.5 in (26.67 cm)

## Pressure Reference LC10-GL2M

Accuracy - Pressure Measurement	+/- 0.25% of Full Scale (ASME B40.100 Grade 3A/ISO Class 0.25)
Battery Count	2
Battery Life	1500 Hours
Battery Type	AA Alkaline (IEC-LR6)
Burst Pressure	1200 PSI / 83 bar / 8.30 MPa
Calibration Certificate	Not included

## Pressure Reference LC10-GL2M

Certifications	Certified to CSA Standard C22.2 No. 61010-1, Conforms to UL / IEC / EN / AS Standard No. 61010-1, Complies with Pressure Equipment Directive 2014/68/EU, Complies with Low Voltage Directive 2014/35/EU, Complies with Electromagnetic Compatibility Directive 2014/30/EU
Country of origin	USA
Datalogging	PC based (via USB)
Electrical Rating	50 mA @ 5 VDC
Engineering Units	atm, bar, cmH2O @4°C, inH2O @39°C, kPa, MPa, mbar, psi, inHg @39°F, kgf / cm <sup>2</sup> , mmHg @0°C, Torr, ftH2O @39°F, cmHg @ 0°C, oz / in <sup>2</sup>
Harmonized Code	9026.20.0000
Ingress Protection	IP67 (1 meter water submersion for 30 minutes)
LCD Display	2.4 in / 61 mm segmented LCD Display
Materials	ABS / Polycarbonate Blend, Powder Coated Aluminum
Max Operating Temperature	120 °F / 50 °C
Max Pressure	300 PSI / 20 bar / 2.00 MPa
Max Storage Temperature	165 °F / 75 °C
Measurement Type	Gauge Pressure
Media Compatibility	Air, Alcohol, Antifreeze, Ethylene Glycol, Hydraulic Oil, Inert Gas, Mineral Oil, Natural Gas, Petroleum Based Oil, Skydrol, Windshield washer fluid, Transmission fluid, Light motor oil, Ralston Calibration Oil, Water
Min Operating Temperature	-4 °F / -20 °C
Min Storage Temperature	-40 °F / -40 °C
Operating Altitude (max)	10,000 ft (3050 m)
Panel Mount	No
Primary Power	Battery Power
Process Connection	1/4" Male NPT
Process Connection Location	Bottom mount
Protection Class	Pollution Degree 2 (UL / IEC 61010-1)
Relative Humidity	0% to 90% (-10 to 35°C) , 0% to 70% (35 to 50°C)
Sensor Type	High Precision MEMS, Pressure Sensor
Temperature Compensation	None
USB Connection	USB (Micro B)
Wetted Materials	316 Stainless Steel
Wrench Size	7/8 In 23 mm
Weight	12.6 oz / 355 grams
Dimensions	H: 1.75 in (4.45 cm) x W: 3.4 in (8.64 cm) x D: 4.1 in (10.41 cm)

## Reference Connection QTHA-2FSA

### Reference Connection QTHA-2FSA

Country of origin	USA
Has Check Valve	No
Materials	Stainless Steel
Max Operating Temperature	225 °F / 105 °C
Max Pressure	5000 PSI / 350 bar / 35 MPa
Max Vacuum	0.00 InHg / 0.0 kPa
Wrench Size	3/4 In 19 mm
Connector End 1	1/4" Female NPT (ASME B1.20.1)
Connector End 2	Female Quick-test
Dimensions	H: 1.52 in (3.86 cm) x W: 0.75 in (1.91 cm)

### Process Connection QTHA-2MS0

Country of origin	USA
Has Check Valve	No
Materials	Stainless Steel
Max Operating Temperature	225 °F / 105 °C
Max Pressure	5000 PSI / 350 bar / 35 MPa
Max Vacuum	0.00 InHg / 0.0 kPa
Min Operating Temperature	0 °F / -18 °C
Seal Materials	Buna-N
Wrench Size	9/16 In 15 mm
Connector End 1	1/4" Male NPT (ASME B1.20.1)
Connector End 2	Male Quick-test
Dimensions	H: 1.29 in (3.28 cm) x W: 0.56 in (1.42 cm)

### Hose QSQS-HOS-3ft

Burst Pressure	27000 PSI / 1860 bar / 185 MPa
Color	Silver
Country of origin	USA
Fluid Media	Air, Inert Gas, Natural Gas, Petroleum Based Oil, Water
Hose Length	3ft / 0.91 m
Inner Diameter	0.08 In / 3.00 mm
Length	3 ft / 92 cm
Materials	Stainless Steel
Max Operating Temperature	140 °F / 60 °C
Max Pressure	6900 PSI / 475 bar / 48 MPa
Max Vacuum	-30.00 InHg / -101.6 kPa

**Hose** QSQS-HOS-3ft

Media Compatibility	Air, Inert Gas, Natural Gas, Petroleum Based Oil, Water
Min Operating Temperature	-40 °F / -40 °C
Minimum Bend Radius	1.00 In / 26 mm
Outer Diameter	0.20 In / 6.00 mm
Type	QT